




# RUSH RIVER

steel & trim


RushRiverSteel.com  
507-248-3577




**BeckryTech Highly Durable Polyester System by Beckers offers a 40-year limited warranty and are ideal for a variety of residential, agricultural, industrial, and commercial metal building applications**

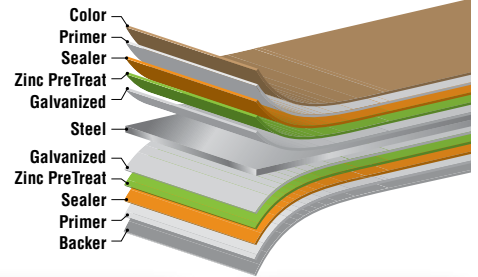


Standard Colors



Brilliant White\*



Alamo White\*



Light Stone\*



Ash Gray\*



Charcoal\*



Dark Green\*



Gallery Blue\*



Burnished Slate\*



Burgundy\*



Acrylic Bare\*



Taupe



Light Gray



Tan



Rustic Red



Bright Red




Hawaiian Blue



Brown



Hunter Green




Black




Copper Metallic


Textured Colors




BlackTex



BrownTex



BurgundyTex




RustTex




Quaker GrayTex



GreenTex



RedTex




Burnished SlateTex

Color selections are close representations but are limited by processing and viewing conditions. Actual metal samples are available by request. For all specific warranty, application, installation, and technical information regarding our products, please contact Rush River for more information.



\*Also available in 26 ga PBR panels

**Tuff-Rib**

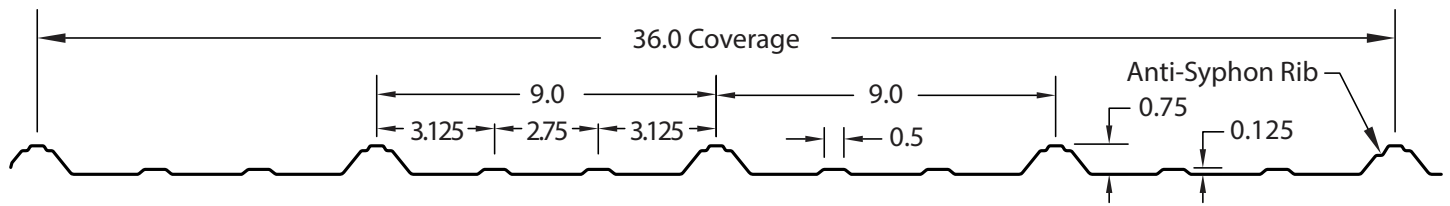

**Panel Specifications:**

- 36" panel coverage
- 3/4" high rib
- Bell top trapezoidal rib on 9" centers
- Exposed fastened, low profile panel
- Applies over open framing or solid substrate
- Minimum roof slope: 3:12
- 28 colors available
- Drip Stop felt available

**Testing & Approvals:**


- UL 790, Class A Fire Resistance
- UL2218 Class 4 Impact Resistance
- ASTM E 1646 Water infiltration

**Substrate Specifications:**


- 29 ga. (.0150"), ASTM A653, Grade 80, minimum spangle, G60 zinc-coated (galvanized) structural steel
- G100 galvanized available for animal confinement buildings

**Paint Specifications:**

- *BeckryTech* Highly Durable Polyester System by Becker Paints
- All colors Energy Star approved
- The new *Textured BeckryTech* finish now available in 8 leading colors

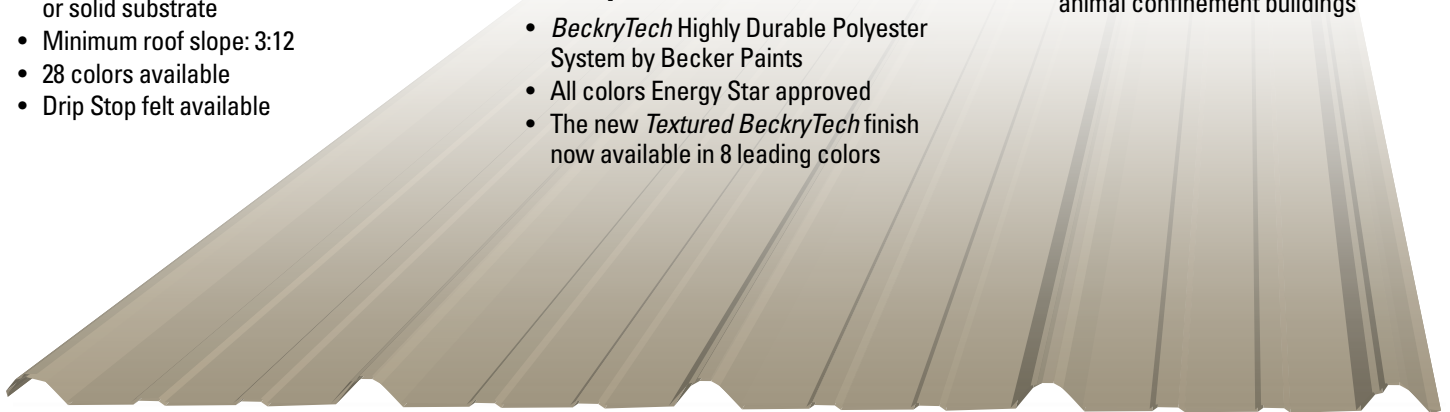

**PBR Panel**

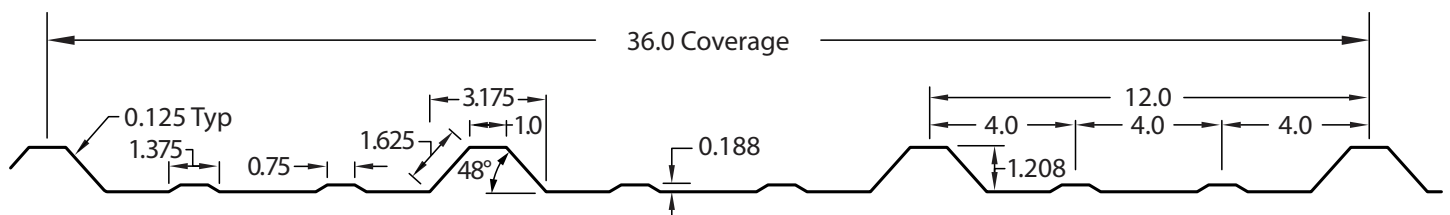

**Panel Specifications:**

- 36" panel coverage
- 1-1/4" high rib
- Trapezoidal rib on 12" centers
- Exposed fastened, low profile panel
- Applies over open framing or solid substrate
- Minimum roof slope: 1:12
- 10 colors available
- Drip Stop felt available

**Testing & Approvals:**

- UL 790, Class A Fire Resistance
- UL2218 Class 4 Impact Resistance

**Substrate Specifications:**

- 26 ga. (.0187), ASTM A653, Grade 80, minimum spangle, G60 zinc-coated (galvanized) structural steel
- G90 galvanized available for animal confinement buildings

**Paint Specifications:**

- *BeckryTech* Highly Durable Polyester System by Becker Paints
- All colors Energy Star approved

